


80WD-M(2)

80WD-M(2) series dc brushless motor

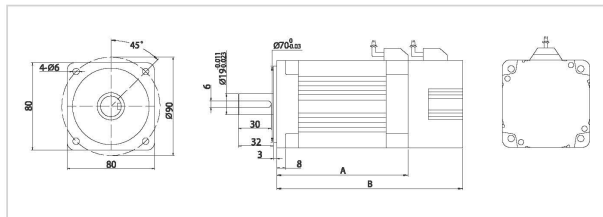


Model	Rated voltage (V)	Rated power (KW)	Rated torque (Nm)	Rated speed (RPM)	Rated electric current (A)	Instantaneous torque (Nm)	Maximum speed (RPM)	Maximum power (KW)	Electric potential (V/Krpm)
80WD-M01330-72V	72	0.41	1.3	3000	7.09	4	3600	1.2	20.0
80WD-M01360-72V	72	0.82	1.3	6000	16.21	4	7200	2.5	10.0
80WD-M02410-72V	72	0.25	2.4	1000	4.36	7.5	1200	0.8	60.0
80WD-M02420-72V	72	0.50	2.4	2000	8.73	7.5	2400	1.5	30.0
80WD-M02430-72V	72	0.75	2.4	3000	13.09	7.5	3600	2.3	20.0
80WD-M02460-72V	72	1.51	2.4	6000	29.92	7.5	7200	4.5	10.0
80WD-M03310-72V	72	0.35	3.3	1000	6.00	10	1200	1.0	60.0
80WD-M03320-72V	72	0.69	3.3	2000	12.00	10	2400	2.1	30.0
80WD-M03330-72V	72	1.04	3.3	3000	18.00	10	3600	3.1	20.0
80WD-M03360-72V	72	2.07	3.3	6000	41.14	10	7200	6.2	10.0
80WD-M01310-96V	96	0.14	1.3	1000	1.77	4	1200	0.4	80.0
80WD-M01320-96V	96	0.27	1.3	2000	3.54	4	2400	0.8	40.0
80WD-M01330-96V	96	0.41	1.3	3000	5.32	4	3600	1.2	26.7
80WD-M01360-96V	96	0.82	1.3	6000	12.15	4	7200	2.5	13.3
80WD-M02410-96V	96	0.25	2.4	1000	3.27	7.5	1200	0.8	80.0
80WD-M02420-96V	96	0.50	2.4	2000	6.54	7.5	2400	1.5	40.0
80WD-M02430-96V	96	0.75	2.4	3000	9.82	7.5	3600	2.3	26.7
80WD-M02460-96V	96	1.51	2.4	6000	22.44	7.5	7200	4.5	13.3
80WD-M03310-96V	96	0.35	3.3	1000	4.50	10	1200	1.0	80.0
80WD-M03320-96V	96	0.69	3.3	2000	9.00	10	2400	2.1	40.0
80WD-M03330-96V	96	1.04	3.3	3000	13.50	10	3600	3.1	26.7
80WD-M03360-96V	96	2.07	3.3	6000	30.85	10	7200	6.2	13.3

Motor interface, Voltage, Speed can be customized.

110WD-M(1)

110WD-M(1) series dc brushless motor

Low voltage, high power, high efficiency

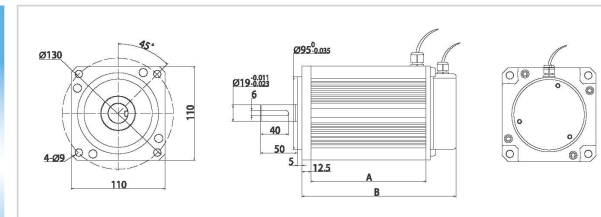

Model	Rated voltage (V)	Rated power (KW)	Rated torque (Nm)	Rated speed (RPM)	Rated electric current (A)	Instantaneous torque (Nm)	Maximum speed (RPM)	Maximum power (KW)	Electric potential (V/Krpm)
110WD-M02010-24V	24	0.2	2	1000	10.9	6	1200	0.6	20.0
110WD-M02020-24V	24	0.4	2	2000	21.8	6	2400	1.3	10.0
110WD-M02030-24V	24	0.6	2	3000	32.7	6	3600	1.9	6.7
110WD-M04010-24V	24	0.4	4	1000	21.8	12	1200	1.3	20.0
110WD-M04020-24V	24	0.8	4	2000	43.6	12	2400	2.5	10.0
110WD-M04030-24V	24	1.3	4	3000	65.4	12	3600	3.8	6.7
110WD-M06010-24V	24	0.6	6	1000	32.7	18	1200	1.9	20.0
110WD-M06020-24V	24	1.3	6	2000	65.4	18	2400	3.8	10.0
110WD-M06030-24V	24	1.9	6	3000	98.2	18	3600	5.7	6.7
110WD-M02010-48V	48	0.2	2	1000	5.5	6	1200	0.6	40.0
110WD-M02020-48V	48	0.4	2	2000	10.9	6	2400	1.3	20.0
110WD-M02030-48V	48	0.6	2	3000	16.4	6	3600	1.9	13.3
110WD-M02060-48V	48	1.3	2	6000	37.4	6	7200	3.8	6.7
110WD-M04010-48V	48	0.4	4	1000	10.9	12	1200	1.3	40.0
110WD-M04020-48V	48	0.8	4	2000	21.8	12	2400	2.5	20.0
110WD-M04030-48V	48	1.3	4	3000	32.7	12	3600	3.8	13.3
110WD-M04060-48V	48	2.5	4	6000	74.8	12	7200	7.5	6.7
110WD-M06010-48V	48	0.6	6	1000	16.4	18	1200	1.9	40.0
110WD-M06020-48V	48	1.3	6	2000	32.7	18	2400	3.8	20.0
110WD-M06030-48V	48	1.9	6	3000	49.1	18	3600	5.7	13.3
110WD-M06060-48V	48	3.8	6	6000	112.2	18	7200	11.3	6.7
110WD-M02010-72V	72	0.2	2	1000	3.6	6	1200	0.6	60.0
110WD-M02020-72V	72	0.4	2	2000	7.3	6	2400	1.3	30.0

Motor interface, Voltage, Speed can be customized.